

MV-CH250-60GM/GC

25 MP GigE Area Scan Camera



GEN*<i>*CAM

GigE
VISION

Introduction

MV-CH250-60GM/GC camera adopts CMOS sensor to provide high-quality images. It uses GigE interface to transmit non-compressed images in real time, and its max. frame rate can reach 4.7 fps in full resolution.

Key Features

- Supports manual adjustment of gain, LUT, Gamma correction, etc.
- Easy and flexible installation, with mounting holes on both panels of the camera.
- Supports hardware trigger, software trigger, and anyway mode, etc.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard.


Available Model

- Mono camera: MV-CH250-60GM
- Color camera: MV-CH250-60GC


Applicable Industry

SMT/ PCB AOI, FPD, PV industry, etc.

Sensor Quantum Efficiency

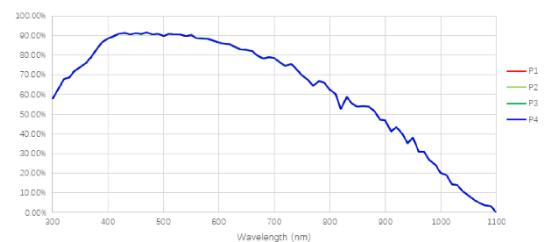


MV-CH250-60GM

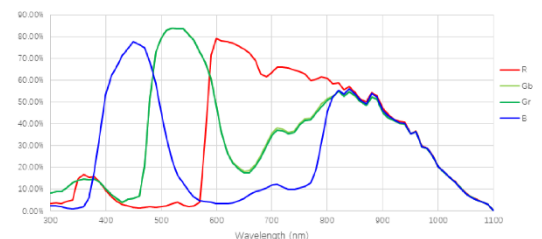

MV-CH250-60GC

Dimension

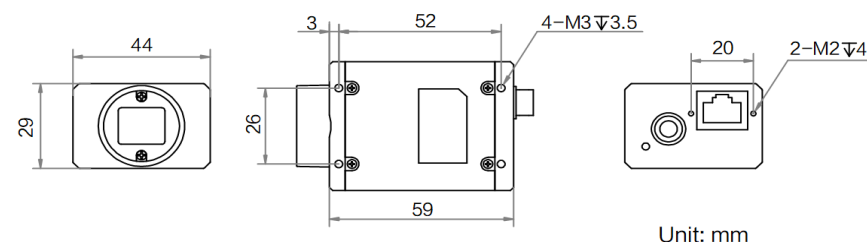

Specification

Model	MV-CH250-60GM	MV-CH250-60GC
Performance		
Sensor type	CMOS, rolling shutter	
Sensor model	Stacked BSI	
Pixel size	2.44 μm × 2.44 μm	
Sensor size	12.6 mm × 12.6 mm	
Resolution	5120 × 5120	
Max. frame rate	4.7 fps @ 5120 × 5120 Mono 8	4.7 fps @ 5120 × 5120 Bayer BG 8
Dynamic range	69.3 dB	
SNR	39.9 dB	
Gain	0 dB to 24 dB	
Exposure time	116 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode, support Global Reset and Trigger Rolling.	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8/10/12, Bayer BG 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_8_YUYV, RGB 8, BGR 8
Binning	Supports 1 × 1, 2 × 2, 4 × 4	
Decimation	Supports 1 × 1, 2 × 2, 4 × 4	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical feature		
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)	
Digital I/O	6-pin P7 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports PoE	
Power consumption	Typ. 3.9 W @ 12 VDC	Typ. 4.6 W @ 12 VDC
Mechanical		
Lens mount	C-mount	
Dimension	29 mm × 44 mm × 59 mm (1.1" × 1.7" × 2.3")	
Weight	Approx. 96 g (0.2 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: −10 °C to 50 °C (14 °F to 122 °F) Storage temperature: −30 °C to 80 °C (−22 °F to 176 °F)	
Humidity	20% RH to 95% RH (no condensation)	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11, and 32/64-bit Linux	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, RoHS, KC	