

MV-CS050-20GM/GC

5 MP 2/3" CMOS GigE Area Scan Camera



GEN*i*CAM

GigE
VISION



Introduction

With GigE interface, MV-CS050-20GM/GC camera adopts OnSemi XGS5000 sensor to provide high-quality images and transmit images in real time, and its max. frame rate can reach 22.7 fps in full resolution.

Key Feature

- Adopts brand new design to reduce power consumption.
- Supports contrast ratio function to adjust image clarity.
- Supports auto or manual adjustment for gain, exposure control, LUT, Gamma correction, etc.
- Compact design with mounting holes on panels for flexible mounting from 4 sides.
- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard.

Dimension

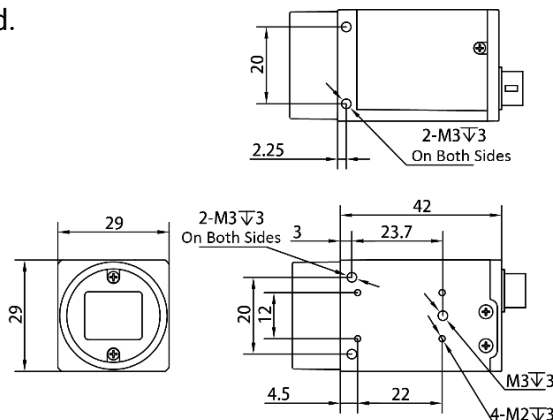

Unit: mm

Available Model

- Mono camera: MV-CS050-20GM
- Color camera: MV-CS050-20GC

Applicable Industry

SMT/ PCB AOI, consumer electronics, electrical semiconductor, etc.

Sensor Quantum Efficiency

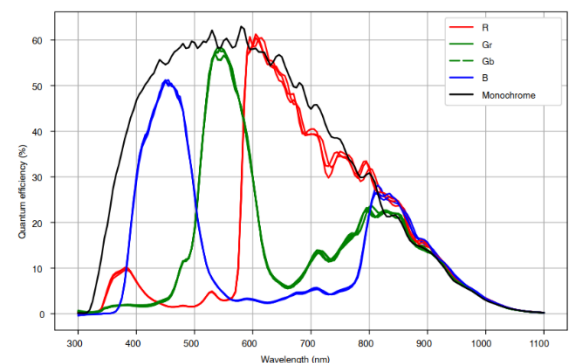


Figure 57. Quantum Efficiency (Mono)

Specification

Model	MV-CS050-20GM	MV-CS050-20GC
Camera		
Sensor type	CMOS, global shutter	
Sensor model	OnSemi XGS5000	
Pixel size	3.2 μm × 3.2 μm	
Sensor size	2/3"	
Resolution	2592 × 2048	
Max. frame rate	22.7 fps @ 2592 × 2048	
Dynamic range	66 dB	
SNR	39.6 dB	
Gain	0 dB to 18 dB	
Exposure time	UltraShort exposure mode: 23 μs to 99 μs	
	Standard exposure mode: 100 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8/10/12, Bayer RG 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 × 1, 2 × 2, 4 × 4	
Decimation	Supports 1 × 1, 2 × 2	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical features		
Data interface	Gigabit Ethernet, compatible with Fast Ethernet	
Digital I/O	6-pin P7 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports PoE	
Power consumption	Typ. 2.5 W @ 12 VDC	Typ. 2.7 W @ 12 VDC
Mechanical		
Lens mount	C-mount	
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.2")	
Weight	Approx. 100 g (0.22 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: −30 °C to 60 °C (−22 °F to 140 °F)	
	Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F)	
Humidity	20% RH to 95% RH (no condensation)	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows 7/10, 32/64-bit Linux	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, RoHS, KC	