

MV-SC2016EC

1.6 MP Color Vision Sensor

With built-in positioning and measurement algorithms, MV-SC2016EC vision sensor can realize counting, existence, measurement detection, and recognition. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via I/O. The vision sensor supports multiple result output methods and customized result text output.



Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to for counting, existence, measurement detection, and recognition.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including RS-232, TCP, UDP, FTP, PROFINET, Modbus, Ethernet/IP, etc.

Typical Application

- Consumer electronics
- Food and pharmaceutical
- Automotive industry



Specification


Model	MV-SC2016EC-08S-WBN	MV-SC2016EC-12S-WBN	MV-SC2016EC-15S-WBN
Tool			
Vision tool	● Measurement: P2P measurement, P2L measurement, contrast measurement, greyscale size, edge width measurement, width measurement, brightness average value, L2L angle, color measurement, color size, diameter measurement, and line angle ● Existence: Anomaly judge, spot existence, edge existence, contour existence, pattern existence, circle existence, and line existence ● Count: Spot count, edge count, contour count, color count, and pattern count ● Recognition: Category recognition, color contrast, classification registration, color recognition, and OCR ● Logic: Calculator, logic judge, condition judge, combination judge, format output, If module, and character comparison ● Location: Fixture		
Solution capacity	Supports solution importing and exporting, up to 8 solutions and 40 modules can be stored.		
Communication protocol	RS-232, TCP, UDP, FTP, PROFINET, Modbus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/2.9"		
Resolution	1408 × 1024		
Max. frame rate	60 fps		
Gain	0 dB to 15 dB		
Exposure time	16 μs to 1 sec		
Pixel format	Mono 8, RGB 8		
Mono/color	Color		
Electrical feature			
Data interface	Fast Ethernet (100 Mbit/s)		
Digital I/O	Ethernet female connector supports Ethernet communication. 8-pin green terminal provides power, digital I/O, and serial port, including non-isolated input × 1 (Line 2), non-isolated output × 1 (Line 3), configurable non-isolated I/O × 2 (Line 0/1), RS-232 × 1, and external button input × 1 (BUTTON)		
Power supply	12 VDC to 24 VDC		
Power consumption	Avg. 6 W @ 24 VDC Max. 22 W @ 24 VDC		
Mechanical			
Lens mount	M12-mount, adjusting focus manually supported		
Focal length	8 mm	12.4 mm	14.8 mm
Lens cap	Transparent lens cap		
Light source	White LED lamp		

Indicator	Power indicator (PWR), network indicator (LNK), and status indicator (STS).
Dimension	46 mm × 57.6 mm × 25 mm (1.8" × 2.3" × 1.0")
Weight	Approx. 220 g (0.5 lb.)
Ingress protection	IP65
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% RH to 95% RH (no condensation)
General	
Client software	SCMVS
Certification	CE, KC

Available Model


- 8 mm focal length: MV-SC2016EC-08S-WBN
- 12.4 mm focal length: MV-SC2016EC-12S-WBN
- 14.8 mm focal length: MV-SC2016EC-15S-WBN

Dimension

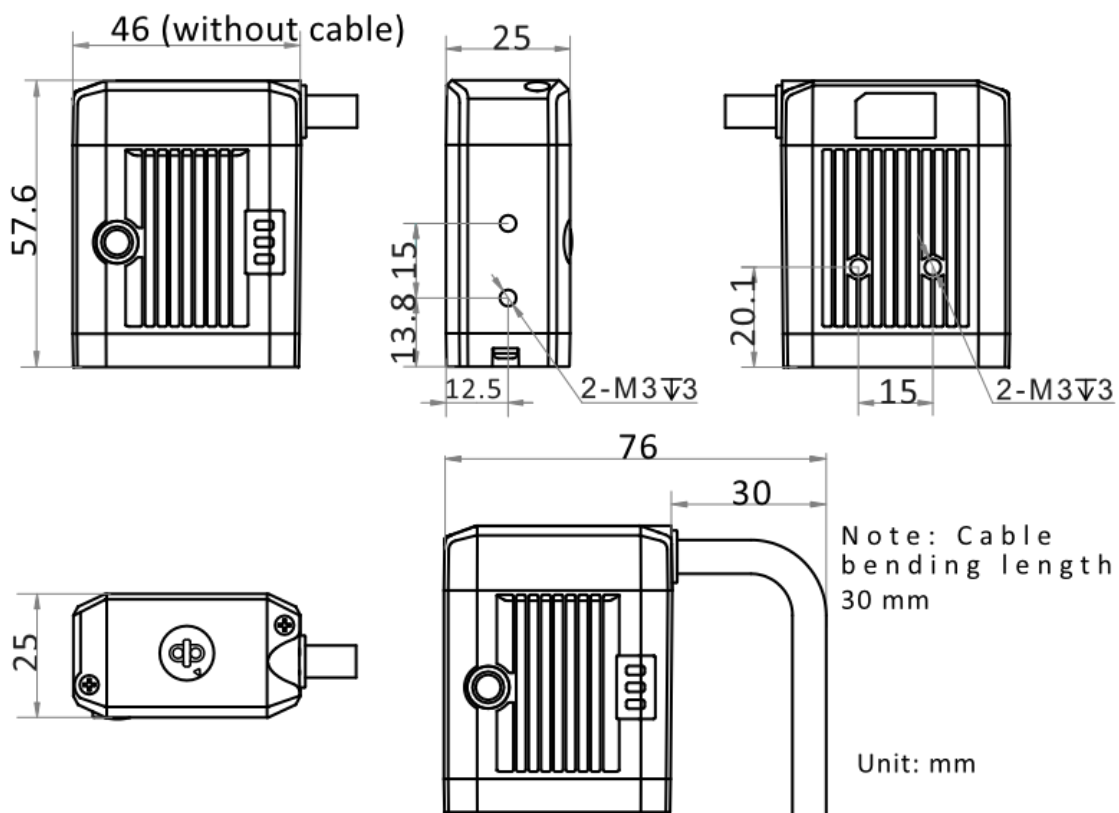

Detection Range

Focal Length	Installation Distance	Field of View	Single Pixel Accuracy
8 mm	80 mm	47.62 mm × 34.64 mm	0.034 mm
	2000 mm	1190.59 mm × 865.88 mm	0.846 mm
12.4 mm	200 mm	78.35 mm × 56.98 mm	0.056 mm
	2000 mm	783.48 mm × 569.81 mm	0.556 mm
14.8 mm	270 mm	88.62 mm × 64.45 mm	0.063 mm
	2000 mm	656.43 mm × 477.41 mm	0.466 mm

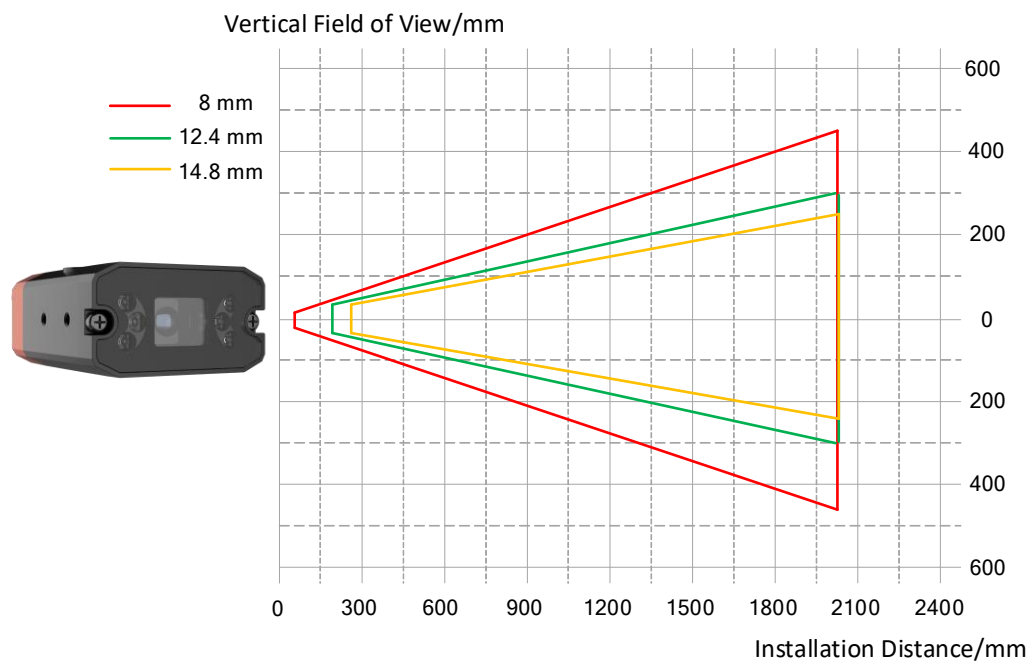

HIKROBOT

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.